

'Twist, Click & Lock' mechanism

This patent pending feature allows the TF1 Compact to be positioned and locked into up to 24 different orientations, saving valuable time on-site.

Using a flat end screwdriver in the recess shown, gently lever the locking clip into the 'unlock' position.



Pull the inlet/outlet port approximately 3 mm away from the body to allow rotation to the required position.



Push the inlet/outlet port back towards the body of the unit to prevent further rotation.



Push the locking clip securely back into the 'lock' position.



www.fernox.com



As with all Fernox products, the TF1 range has been designed, manufactured and tested to the highest specification. The company's attention to detail and commitment to quality is synonymous with the Fernox brand.

As an innovator, Fernox consistently produces premium products for the plumbing and heating industry and the TF1 filters are no exception.



Fernox, Forsyth Road, Sheerwater, Woking, Surrey GU21 5RZ
Sales: 0870 601 5000 Fax: 0870 601 5005 Technical: 0870 870 0362
sales@fernox.com www.fernox.com



The revolutionary Fernox TF1 Range

a name you can trust...



www.fernox.com

The Fernox filter range has been extended with the **TF1 Compact**. The unit is designed for properties where space or restricted access prevents the installation of a full-sized filter.

Installers can now offer **all** their customers a high performance filter, which uses award-winning technology, to protect the boiler and system from contaminants which can cause system breakdown and long-term damage.

- TF1 in-line filters harness the combined effects of hydrocyclonic action with specially designed magnetic assemblies to remove, trap and contain both magnetic and non-magnetic debris from system water
- 'Twist, Click and Lock' technology saves time on-site – no need for 'O' rings or washers
- TF1 magnet assemblies provide 9,000 gauss strength to optimise sludge removal
- Cleaned in seconds without disassembly or removal from the system
- Fits into vertical or horizontal pipe work
- Supplied with all quality valves and fittings, as standard

Fernox TF1 Total Filter

- Available in 22 and 28 mm versions
- Designed to be able to dose Fernox 'F' range products
- Optimised conical shape for enhanced hydrocyclonic action
- Voted by the trade as *Corgi Installers' Mate Product of the Year*




Fernox TF1 Compact

- Ideal for kitchens, utility rooms or new builds where space is limited
- Can be installed in up to 24 different orientations and operate at a 45° angle if headroom clearance does not otherwise allow a filter to be fitted
- Available in 22 mm
- Designed to be able to dose with Fernox Express range of aerosols




How to clean any Fernox TF1 filter

1. Close inlet/outlet valves
2. Remove magnet

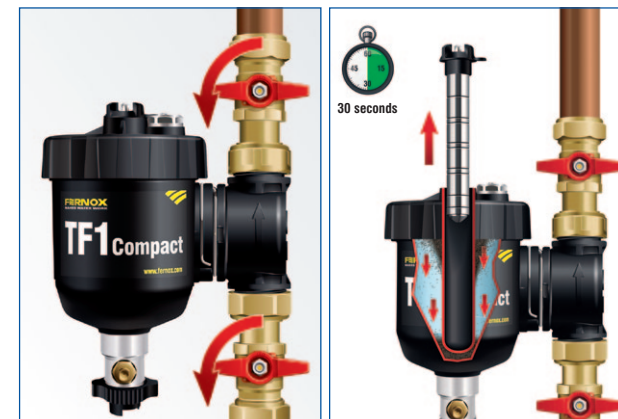

3. Open outlet and drain valves
4. Close drain valve, replace magnet and open inlet

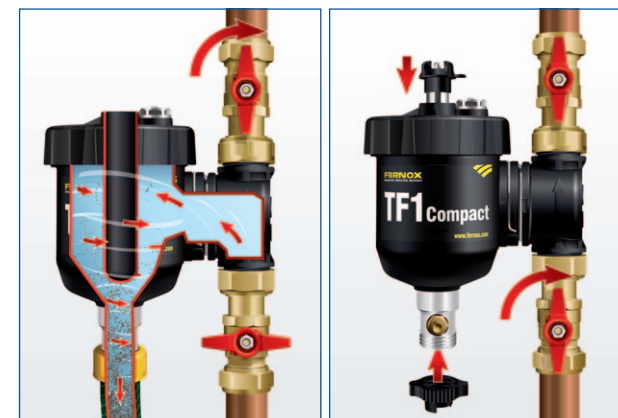

NB: No need to remove lid collar to clean the filter